

Avro 65000


Avro Extended **Ball Bearing** Microstop

- Spindle mounted on 4 ball bearings.
- Spindle supported by needle bearing and trust bearing.
- Bearing protected by dust shield.
- Stainless Steel body.
- Stainless Steel Luck Nut left hand.
- Shank 6,35mm (1/4").
- Stroke 8mm (5/16").
- Depth adjustment (1 scale division= .0005"; 0.0127mm)
- Rated at 10000 rpm



Model	Shaft	Cutter Dia Inch / mm	ID Skirt Inch / mm	OD Skirt Inch / mm	No-Mar Foot piece	Stainless Foot piece
65002	1/4-28	.300 / 7.62	.33 / 8.5	.59 / 15	A65002	A65002S
65002M6	M6 X 1	.300 / 7.62	.33 / 8.5	.59 / 15	A65002	A65002S
65003	1/4-28	.375 / 9.5	.41 / 10.5	.67 / 17	A65003	A65003S
65003M6	M6 X 1	.375 / 9.5	.41 / 10.5	.67 / 17	A65003	A65003S
65004M6	M8 X 1	.562 / 14.5	.65 / 16.5	.90 / 23	A65004	A65004S

Technical informations (mm)

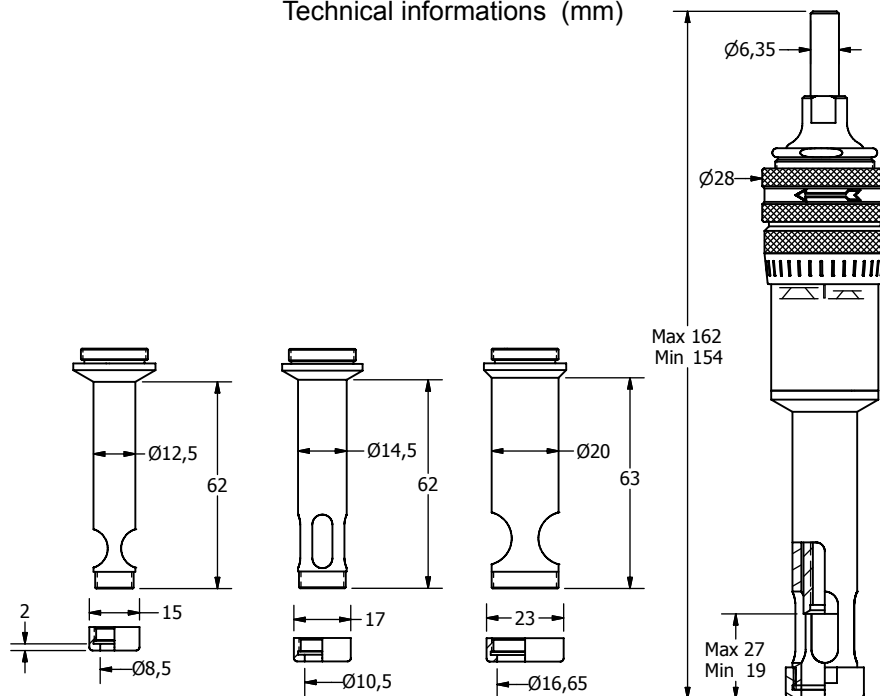

4175 BOUL, Poirier
 Montréal, Québec, Canada H4R 2G9
 T: 514-336-9444 | 1-886-874-9444
 F: 514-336-0277 | 1-888-336-0544
 info@avrotools.com

B

avrotools.com